
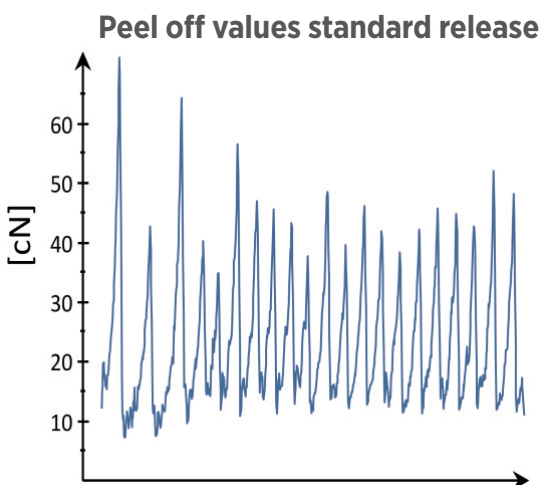



THE SOLUTION FOR YOUR ZIPPY RELEASE PROBLEMS! PREMIUM RELEASE FOR BUTYL RUBBERS

Especially for applications using butyls we developed our premium release coating, suitable for PET and PP films. This silicone coating shows an even and steady peel off, providing low release values.

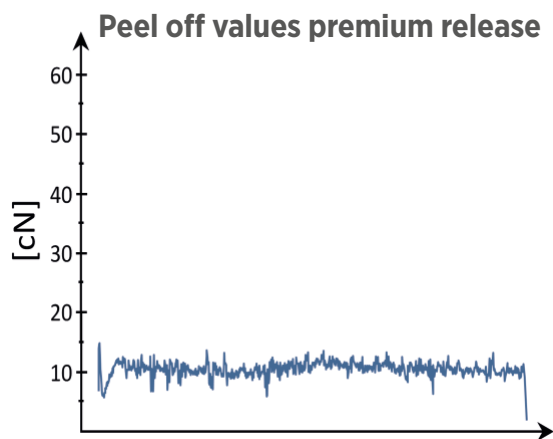

Typical release values on PET film. Direct comparison using 180°C at 1000 mm/min to peel off the liner from the Butyl. 24h storage at 40°C under 2 kg weight.

The following overview shows the testing of 4 different easy-release silicone systems on PET film against different butyl rubbers from our customers.

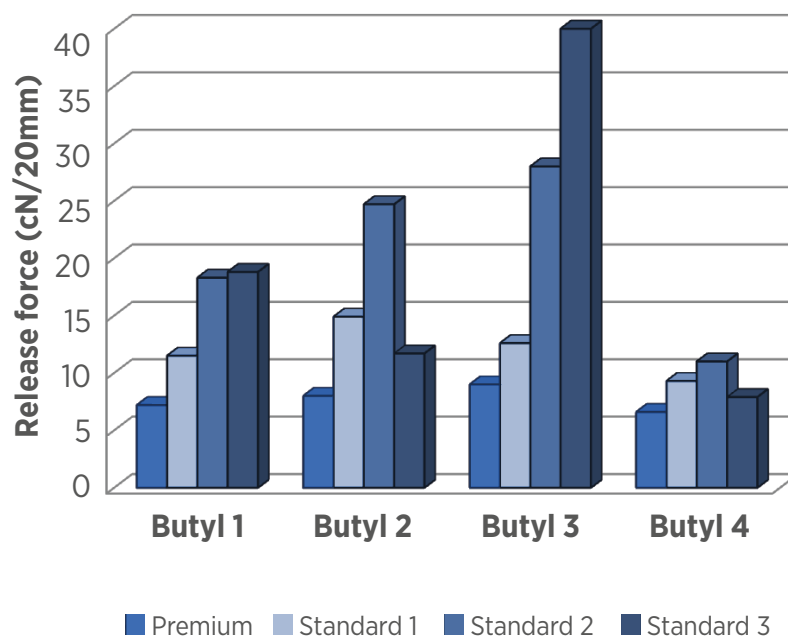

24h storage at 40°C under 2 kg weight, cooling down for 1 hour at room temperature.
180°C at 1000 mm/min to peel off the liner from the Butyl.

We would be pleased to discuss your needs to find the perfect liner solution for your application.